

FIRMWARE RELEASE NOTES

WideyeTM iSaviTM Satellite User Terminal

Firmware Version : R02.0.0

Release Date : 15th Nov 2016

wideyeTM

liberating communications

addvalue
enabled

FIRMWARE RELEASE NOTES

Note:

This upgrade is MANDATORY for the voice service to work properly with the IsatHub Voice App:

- **Android version 3.7.4 and above**
- **iOS version 3.7.2 and above**

Firmware download information

1. Download the firmware version R02.0.0 from the following websites:
 - <http://www.wideye.com.sg>
 - a. Click on “Support > Downloads” to go to the firmware download options
 - <http://www.inmarsat.com/support/bgan-firmware>
2. Unzip the downloaded package that includes the firmware release notes and the firmware upgrade file.
3. Please refer to Appendix A for firmware upgrade instructions

New features included in this release

The enhancements and bug fixes included in this release (compared to the earlier firmware release R01.1.0) are the following:

- Included support for 32K and 64K streaming when utilizing a BGAN SIM.
- Included security improvement by prompting the user to set a minimum 6 character length password when logging to the Web MMI with the default password of 1234 for the first time. This check is also applied after a factory reset.

FIRMWARE RELEASE NOTES

APPENDIX A – Firmware Upgrade Instructions

1. Entering Safe Mode

- 1.1 Connect your personal computer to the Wi-Fi of your iSavi™.
- 1.2 Login to Web MMI by typing `http://192.168.1.35` or `http://iSavi` into the address bar of the web browser.
- 1.3 Navigate to **Settings > Terminal Settings> Firmware Upgrade** to perform firmware upgrade. Your iSavi™ will reboot into safe mode once you click the Firmware Upgrade button.

Note: Please have the external power adapter connected before starting the firmware upgrade process

HOME
DATA ▾
TELEPHONY ▾
SMS ▾
SETTINGS ▾
LOGOUT

Terminal Settings

iSavi™

Reboot Terminal

Factory Reset

Firmware Upgrade

Need to reboot in the Firmware Upgrade Mode (Safe Mode). Please do it manually if reboot failed.

Disclaimer

Please be informed that firmware upgrading is done at your own risk and the equipment manufacturer will not be held responsible for any possible malfunction or damage to the system due to upgrading the firmware.

If you encounter any problems or have any questions, please contact the equipment distributor for technical support.

FIRMWARE RELEASE NOTES

- 1.4 All of the four Antenna Pointing LEDs are in AMBER colour when Safe Mode is triggered successfully.
- 1.5 Connect your personal computer to the Wi-Fi of your iSavi™ .
- 1.6 Login to the Web MMI in safe mode by typing http://192.168.1.35 or http://iSavi into the address bar of any web browser.

2. Starting Firmware Upgrade

- 2.1 Browse to the file location of the new firmware, select and click Upload

Note: Please have the external power adapter connected while upgrading the firmware

HOME SETTINGS ▾ LOGOUT

Firmware Upgrade iSavi™

New Firmware package to upload: ISAVI-R01.0.2.isv

Disclaimer

Please be informed that firmware upgrading is done at your own risk and the equipment manufacturer will not be held responsible for any possible malfunction or damage to the system due to upgrading the firmware.

If you encounter any problems or have any questions, please contact the equipment distributor for technical support.

- 2.2 The Web MMI will start transferring the firmware to your iSavi™.


HOME SETTINGS ▾ LOGOUT

Firmware Upgrade iSavi™


Transferring Firmware Upgrade Package

FIRMWARE RELEASE NOTES

2.3 Firmware upgrade process will start once the firmware is successfully transferred.

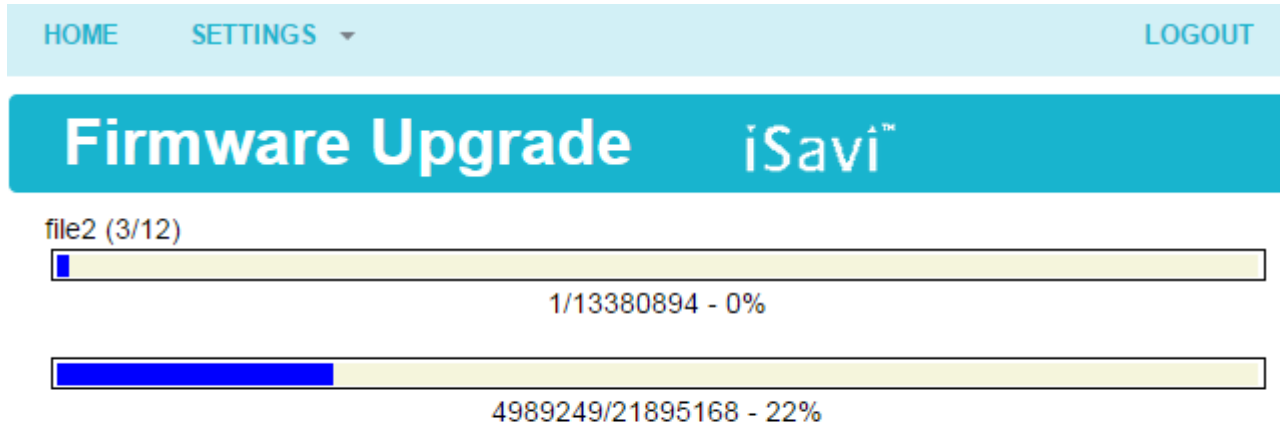

2.4 Firmware upgrade will take less than 10 minutes to complete. You will be prompted with the result: **Firmware Upgrade Completed** message.

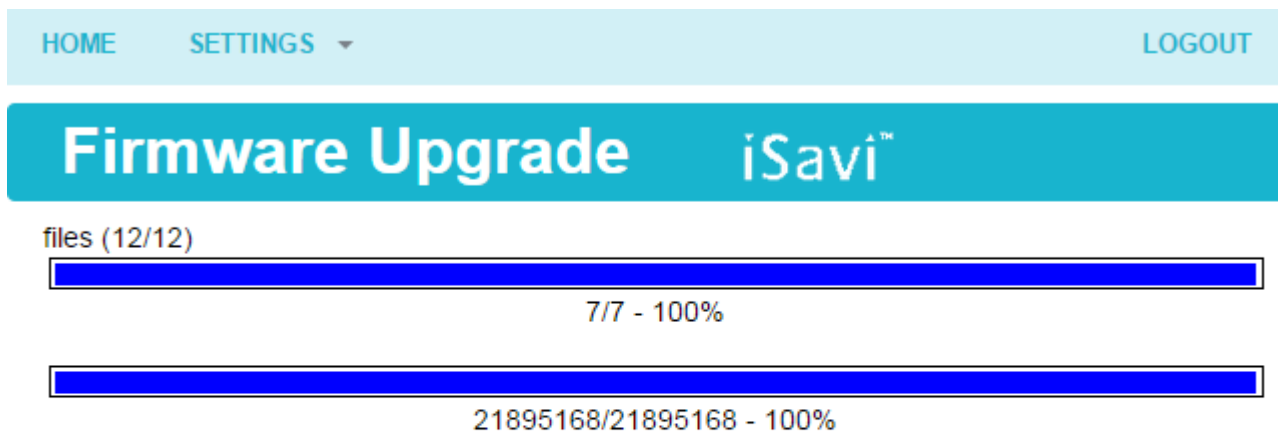

Result: Firmware Upgrade Completed

[Reboot Terminal](#)

2.5 Reboot your iSavi™ by clicking the **Reboot Terminal** to complete the firmware upgrade process.

FIRMWARE RELEASE NOTES

NOTE: Please contact support@wideye.com.sg for more details on any of the information stated in this firmware release notes.

Whilst the above information has been prepared by Addvalue Innovation Pte Ltd ("Addvalue") in good faith, and all reasonable efforts have been made to ensure its accuracy, Addvalue makes no warranty or representation as to the accuracy, completeness or fitness for purpose or use of the information. Addvalue shall not be liable for any loss or damage of any kind, including indirect or consequential loss, arising from use of the information and all warranties and conditions, whether express or implied by statute, common law or otherwise, are hereby excluded to the extent permitted by law of Singapore. Addvalue, the Addvalue Enabled logo, Wideye, and the Wideye logo are either trademarks or registered trademarks of Addvalue Technologies Ltd and/or its affiliates in Singapore and/or other countries.